


PEDESTAL SOLUTION FOR






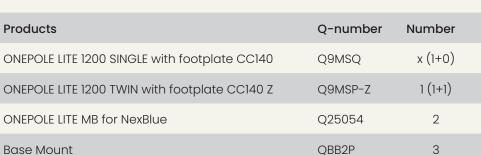

1+0



1+1



ONEPOLE LITE base, height 1200 mm, available in Single or Twin versions. Sleek, strong, and sustainable - made from 75% recycled, seawater-resistant aluminum with Jotun powdercoat for lasting protection, even by the shore. Designed for private areas and homes where 1–2 chargers are needed. Delivered with 140 mm C/C bolt spacing for standard foundations or ONEPOLE PRO Base Mount."

ONEPOLE charging for everyone



PEDESTAL SOLUTION FOR











1-2 chargers pr. pole

Products	Q-number	Number
ONEPOLE PRO 1500	Q9MSL-2	1 (1+0 and 1+1)
ONEPOLE PRO MB for NexBlue	QBIXF	2
Base Mount	QBB2P	3
ONEPOLE PRO Connection Kit	Q7VH5	4

1+0



1+1



ONEPOLE PRO base, height 1500 mm. Built for public parking and office spaces needing multiple poles and chargers. Works with our Connection Kit for easy wiring and daisy-chaining. Available in a DIN Mount version for MCBs, RCBOs, and other components. Made from 75% recycled, seawater-resistant aluminum with Jotun powdercoat for lasting protection, even by the shore. Floor- or ceiling-mountable in space-limited areas. Delivered with 160 mm C/C bolt spacing for standard foundations or ONEPOLE PRO Base Mount. IK10 impact and corrosion-tested, TUV Rheinland certified.





PEDESTAL SOLUTION FOR










0


Product list:

2-4 chargers pr. pole


Products	Q-number	Number
ONEPOLE PRO 1500	Q9MSL-2	1 (2+0 and 2+2)
ONEPOLE PRO Side by side angled	QBBDG	2
ONEPOLE PRO MB for NexBlue	QBIXF	3
Base Mount	QBB2P	4
ONEPOLE PRO Connection Kit	Q7VH5	5

2+0





2+2



* By rotating ONEPOLE Base 90 degrees, you can choose which parking slots you want to cover,as shown in the 2+0 examples...

ONEPOLE PRO base, height 1500 mm. Built for public parking and office spaces needing multiple poles and chargers. Works with our Connection Kit for easy wiring and daisy-chaining. Available in a DIN Mount version for MCBs, RCBOs, and other components. Made from 75% recycled, seawater-resistant aluminum with Jotun powdercoat for lasting protection, even by the shore. Floor- or ceiling-mountable in space-limited areas. Delivered with 160 mm C/C bolt spacing for standard foundations or ONEPOLE PRO Base Mount. IK10 impact and corrosion-tested, TUV Rheinland certified.

ONEPOLE charging for everyone



Contact us for more information about products and pricing.

Email: orders@onepole.no

*NOTE: Please specify the charger model (Nexblue Edge, Edge 2, Edge Max, Delta etc) in the order to make sure you get a Mounting Bracket with the perfect fit.

